

SPECIFICATIONS

Mechanical

DURABILITY: 5,000 Cycles.

INSERTION / WITHDRAWAL FORCE: 0.4 kg-3.0 kg.

Electrical

Voltage Rating: 12V DC

Current Rating: 7A

Contact Resistance: 30mΩ max. Initial

Dielectrical Withstanding Voltage: 250V

Insulation Resistance: 100MΩ min.


Physical

Housing: HTN, UL 94-0, Black


Contact: Copper Alloy

Plating: See "ORDERING INFORMATION"

**JPD Series,
R/A Through hole Type
3 Pins**



DRAWING

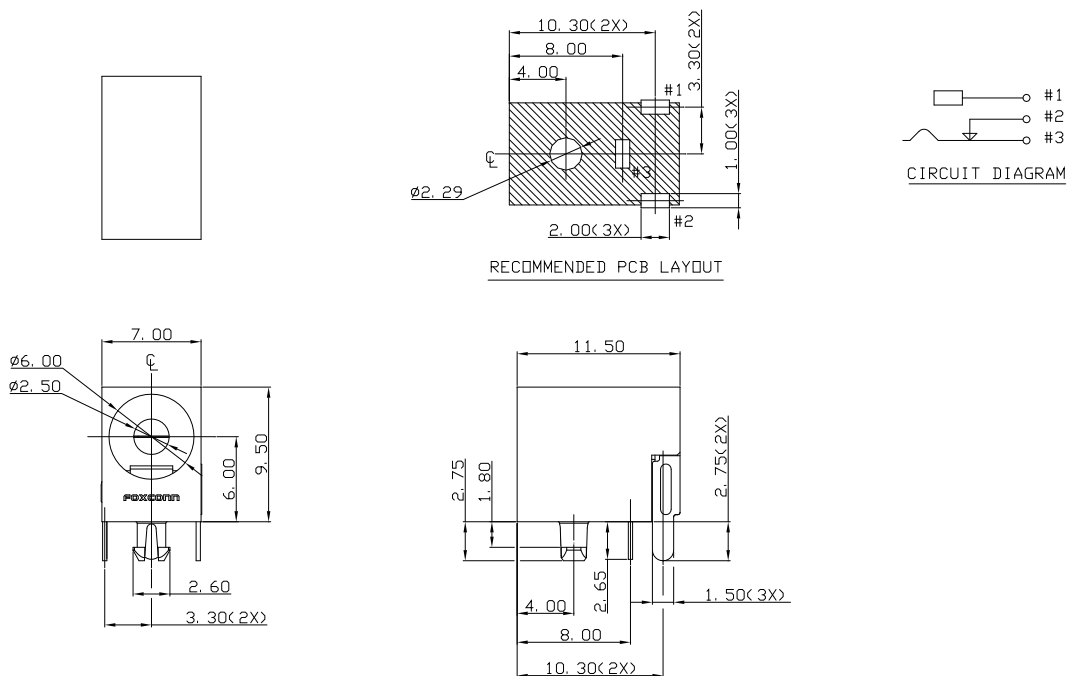

ORDERING INFORMATION

PRODUCT NO.: JPD*0**-H**C**-**

Terminator Type:

0=Straight Through hole

1=R/A Through hole

3=Straight SMT

No. of Contact:

3=3 pin

4=4 pin

Center Contact Plating:

T=Ag plating

N=Ni plating

Lead Free Code:

N=None

F=Lead Free

Package Type:

4=Tray

Center Pin OD (mm):

3=2.5mm

Current Rate:

1=1A Max 2=2A Max.

3=3A Max 4=4A Max

5=5A Max 6=6A Max

7=7A Max 8=8A Max