

SHS2

Additional information about the materials used for gas-insulated switch-disconnectors

1 Introduction

ABB views the protection of our environment as an important factor which helps to improve the competitiveness of the company by reducing the consumption of resources. In our company, environmental protection starts right away in the product development phase. Estimation of the environmental impact of a product takes account of its entire life cycle, from the manufacture of the raw materials to possible recycling or reuse after decommissioning of the equipment. ABB Power Technologies S.p.A., Unità Operativa Sace, is certified with regard to environmental protection to EN ISO 14001 and has in addition committed itself to compliance with the ICC-Charter ¹⁾. ABB is a party to the “Voluntary Agreement of SF₆ Producers, Manufacturers and Users of Electrical Equipment > 1 kV ...” and therefore undertakes “to take back equipment containing SF₆ from its production which is returned by the users”. The recycling operations are fully documented by the parties to the Voluntary Agreement.


2 Scope

This Materials Supplement refers to the substance accruing after decommissioning of gas SHS2 switch-disconnector product family and to the removal of the recyclable SF₆. In the entire life cycle process of gas circuit-breaker ABB follows the principle of avoiding SF₆ emissions wherever possible. With regard to the removal and recovery of used SF₆ from HD4 series, ABB therefore offers to accept the return of the used SF₆ and the HD4 series containing SF₆.

3 Actions at the end of service life


ABB can decommission and dismantle the circuit-breaker. The circuit-breaker is professionally disassembled by ABB and the SF₆ which is as a rule reusable, is removed before the circuit-breaker is divided up into the remaining components. The SF₆ can be removed from SHS2 series by appropriate equipment via an extraction valve at site after decommissioning. If it complies with IEC 60480 standard after removal, it can be reused directly by the operator. If it complies with the gas manufacturer’s “Re-use Specification”, it can be returned as a product to ABB or the gas manufacturer. If the gas-free circuit-breaker is to be returned to use in the same application after decommissioning, it remains classified as a product.

Otherwise, the gas-free circuit-breaker is to be professionally disposed of in accordance with the relevant laws. The substances accruing in that process are — in as far as possible — to be recycled. Disposal is to be documented in accordance with the relevant statutory provisions and directives.

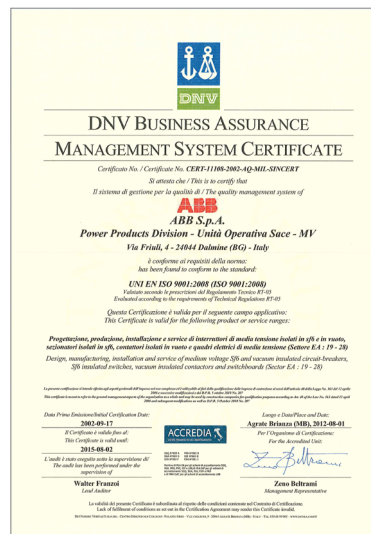

1) ICC: International Chamber of Commerce

4 Material cycle

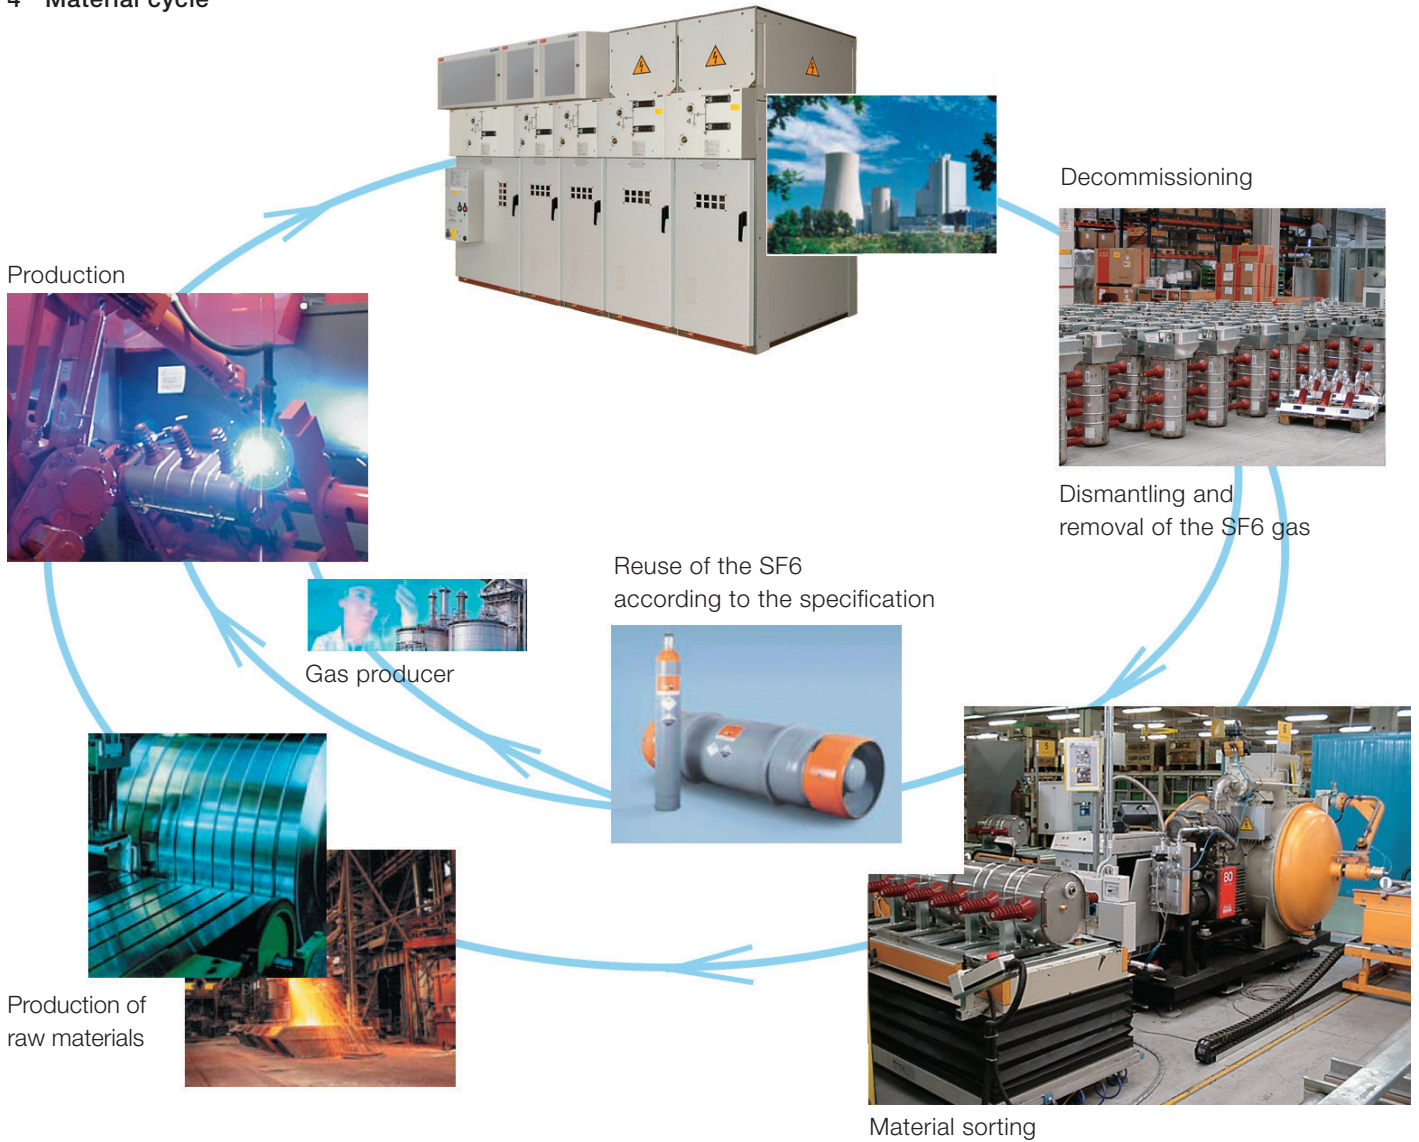

Material	[g]	%
Steel	27.990	50.9
Stainless steel	11.950	21.7
Aluminium	680	1.23
Alumina	100	0.18
Copper	5.120	9.3
Tungsten	30	0.0
Acetylic resin	640	1.16
Polycarbonate + FB30	840	1.54
PVC	8	0.0
Rubber	200	0.36
Epoxy resin	3.520	10.4
SF ₆	350	0.63
Brass	100	0.18
Others	1.410	2.56

The data and illustrations are not binding. We reserve the right to make changes without notice in the course of technical development of the product.

Copyright 2013 ABB. All rights reserved.

For more information please contact:

ABB S.p.A.
Power Products Division
Unità Operativa Sace-MV
 Via Friuli, 4
 I-24044 Dalmine
 Tel.: +39 035 6952 111
 Fax: +39 035 6952 874
 E-mail: info.mv@it.abb.com

ABB AG
Calor Emag Medium Voltage Products
 Oberhausener Strasse 33 Petzower Strasse 8
 D-40472 Ratingen D-14542 Glindow
 Phone: +49(0)2102/12-1230, Fax: +49(0)2102/12-1916
 E-mail: powertech@de.abb.com

www.abb.com